




Installation instruction for toilet seat cover

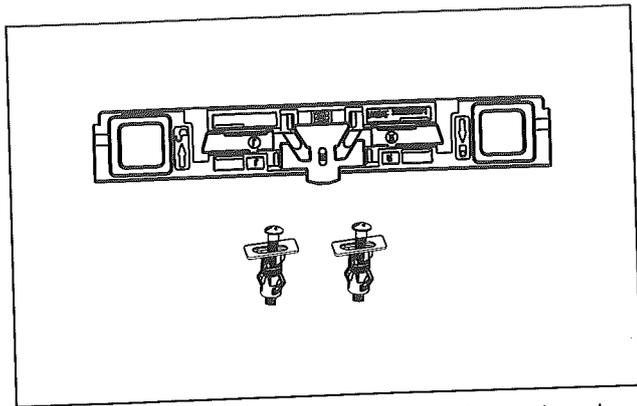


1、 Take out the parts of box as the above drawing shows;

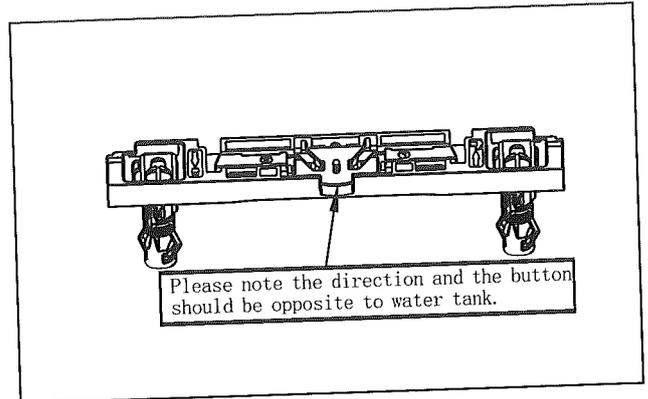


2、 Screw the bolt reasonably tightly and install the base into the ceramic hole with expanding parts.

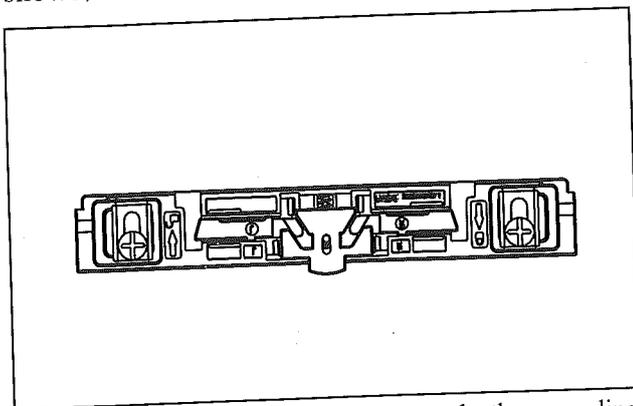


3、 Screw the bolt with screwdriver to make the expanding rubber to expand in the hole, and furthermore can adjust the position of the installation by turning the washer.

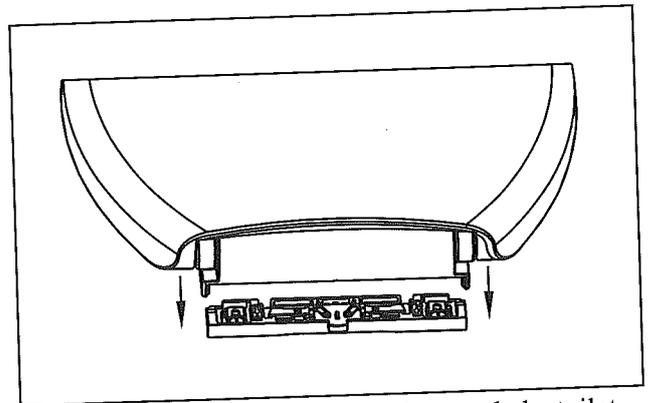


4、 According to the above drawing, push the toilet seat in the level direction until you hear a click.

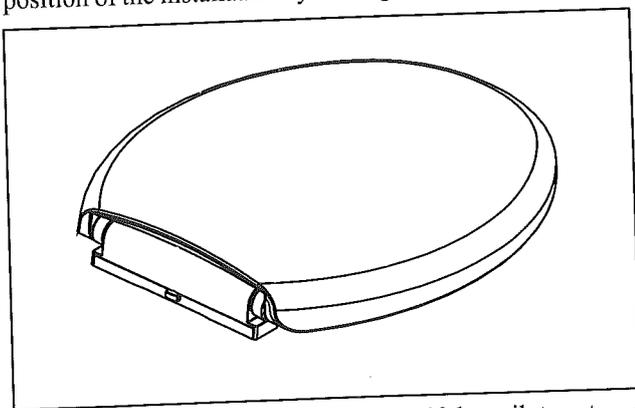


5、 Close the toilet seat and then see if the toilet seat can match the toilet well. If not, please take the step 6 and 7 as reference to remove the toilet seat.

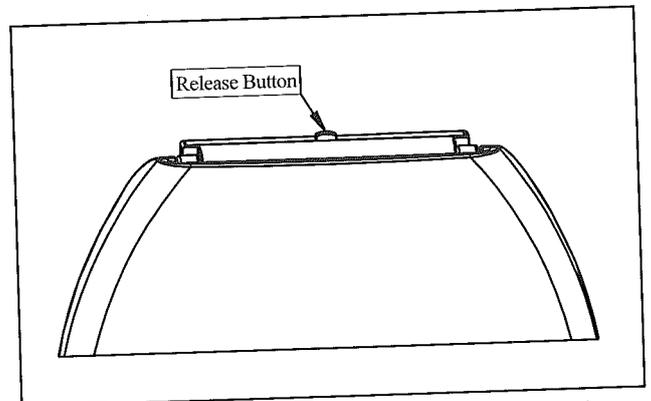

6、 Press the button and loose your hand until you hear a click.

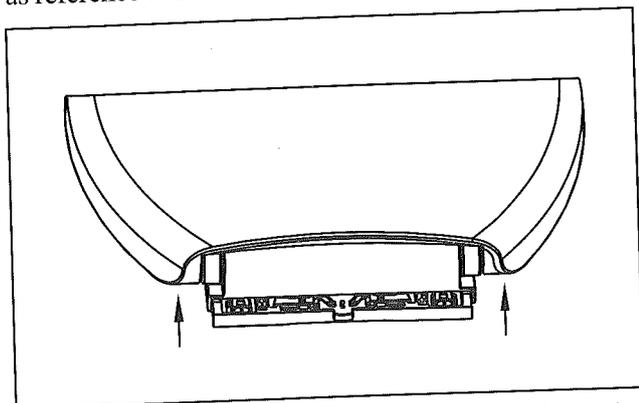

7、 According to the above drawing, pull out the toilet seat in the level direction.

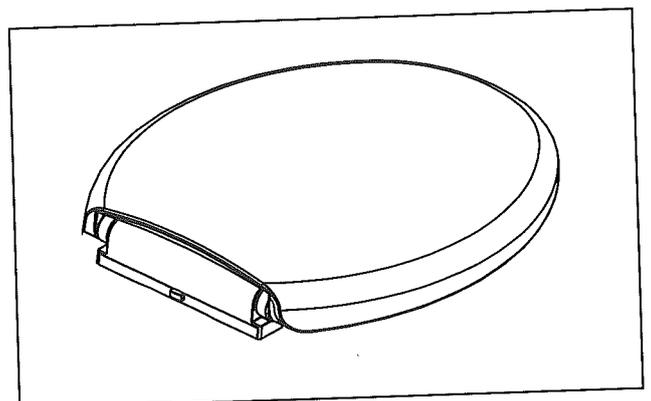

8、 When you clean the toilet seat daily, please remove it according to the step 6 and 7.